

# Jilly linear – The versatile light for modern work

### An independent design for efficient and ergonomic light in offices

Jilly surface-mounted luminaires are suitable for the efficient, standard-compliant lighting of office workplaces – in rooms with solid ceilings and also for uncomplicated modernisation purposes. The flat housing and striking anti-glare louvre set Jilly apart from conventional office luminaires. The lighting technology combines a highly efficient lens system with an anti-dazzle louvre for visual comfort and luminous efficacy. The wattage and light distribution enable wide luminaire spacing for economical lighting concepts.



Technical Region: We reserve the right to make technical and design changes. Edition: 04.06.2024



Structure and characteristics The features described here are typical of products in this range. Special ver-sions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website can be found on our website.

 ERCO lens system
 Made of optical polymer
 Light distributions: extra wide flood or oval wide flood

2 ERCO LED-module - Mid-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)

### 3 Louvre

Polymer, black lacquered or aluminium vaporised, silver, mirror-finish

- 4 Housing
  White (RAL9002)
  Aluminium profile/polymer, powder-
- coated
- Ceiling fixture: metal
- 5 Control gear Switchable or DALI dimmable


Variants on request
Anti-glare louvre: gold matt, silver matt, champagne matt or copper matt-coated and other colours
Housing: 10,000 further colours
Please contact your ERCO consultant.




Design and application: www.erco.com/jilly-linear-s

# Jilly linear Surface-mounted luminaires







# Louvres for efficient visual comfort

A louvre is designed to restrict the view into the luminaire, achieving efficient visual comfort with an emission angle of 90°. An antiglare louvre available in black or silver enables the luminaire to blend with the material and colour of the ceiling.

## Special characteristics

UGR For office workstation lighting from UGR 14.0

Improved visual comfort



 $\downarrow \downarrow \downarrow \downarrow$ 

Different light colours

ERCO mid-power LEDs



Easy installation

Excellent thermal manage-

Switchable

EMC-optimised

ment


Ħ

DALI dimmable

 $\bigcirc$ 

# Jilly linear Surface-mounted luminaires - Luminaire arrangement

**Surface-mounted downlights** Extra wide flood

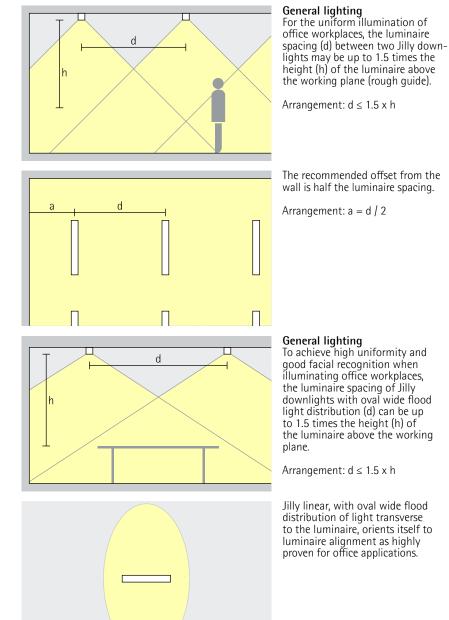

Surface-mounted downlights oval wide flood Oval wide flood

# Jilly linear Surface-mounted luminaires

Construction size	121 S 1106	1106mm
LED module Maximum value at 4000K CRI 82	36W/6735Im	]
Light colour	2700K CRI 92	3500K CRI 92
	3000K CRI 82	4000K CRI 82
	3000K CRI 92	4000K CRI 92
Light distribution	Surface-mounted downlights	Surface-mounted down- lights oval wide flood
	Extra wide flood	Oval wide flood
Control	Switchable	
	DALI DALI	
Colour (housing/louvre)	White/Silver	10,000 colours */ Silver
	White/Black	10,000 colours */ Black

Accessories

Q Q Spacer set



\* available on request

Article numbers and planning data: www.erco.com/017834

Design and application: www.erco.com/jilly-linear-s



