

## Jilly square – The versatile light for modern work

### **An independent design for efficient and ergonomic light in offices**

Jilly recessed luminaires represent a particularly efficient solution for standard-compliant office workplace lighting. The concise appearance with striking anti-glare louvre set Jilly apart from conventional office luminaires. The lighting technology combines a highly efficient lens system with an anti-dazzle louvre for visual comfort and luminous efficacy at the same high level.



## Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

### 1 ERCO lens system

- Made of optical polymer
- Light distributions: extra wide flood or oval wide flood

### 2 ERCO LED-module

- Mid-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)

### 3 Louvre

- Polymer, black lacquered or aluminium vaporised, silver, mirror-finish

### 4 Housing

- Polymer, white

### 5 Mounting frame (size 5)

- Covered mounting detail
- Fixing for ceiling thicknesses of 1–30mm
- Polymer, white
- For flush mounting: mounting frame to be ordered separately, fixing for ceiling thicknesses of 12.5–25mm

### 6 Control gear

- Switchable, phase dimmable, DALI dimmable or Casambi Bluetooth
- Phase dimmable version: Dimming with external dimmers possible (trailing edge)

### Variants on request

- Anti-glare louvre: gold matt, silver matt, champagne matt or copper matt-coated and other colours
  - Housing: 10,000 further colours
- Please contact your ERCO consultant.




Design and application:  
[www.erco.com/jilly-square](http://www.erco.com/jilly-square)

## Jilly square Recessed luminaires



**Suitable for office workstations**  
ERCO develops luminaires with the specifications of good glare control and high visual comfort. UGR values are used as support for purely norm-referenced lighting. With downlights though this should not be carried out using 'blanket' values, but should be implemented according to the individual arrangement of luminaires in the room.

















**Louvres for efficient visual comfort**  
A louvre is designed to restrict the view into the luminaire, achieving efficient visual comfort with an emission angle of 90°. An anti-glare louvre available in black or silver enables the luminaire to blend with the material and colour of the ceiling.




**Shallow recess depth**  
For compact mounting situations, ERCO has developed luminaires with a shallow recess depth to provide excellent light quality in areas with limited installation space.

### Special characteristics

 For office workstation lighting from UGR 14.5	 ERCO mid-power LEDs  Efficient lens system	 Excellent thermal management  EMC-optimised	 Switchable  Phase dimmable
 Improved visual comfort	 Different light colours	 Various construction sizes	 DALI dimmable
 Shallow recess depth		 Tool-free mounting	 Casambi Bluetooth

## Jilly square Recessed luminaires – Luminaire arrangement


### Downlights Extra wide flood

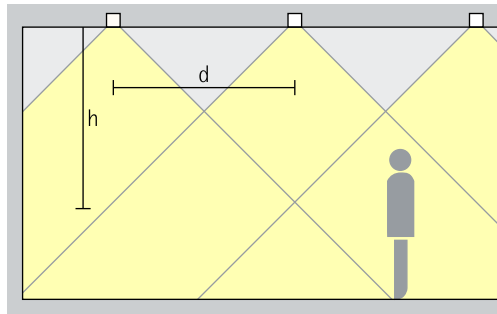

### General lighting

For the uniform illumination of office workplaces, the luminaire spacing (d) between two Jilly downlights may be up to 1.5 times the height (h) of the luminaire above the working plane (rough guide).


Arrangement:  $d \leq 1.5 \times h$

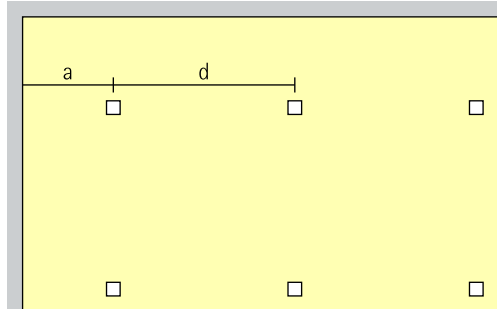

The wall offset should be half the luminaire spacing.

Arrangement:  $a = d / 2$

### Downlights oval wide flood Oval wide flood

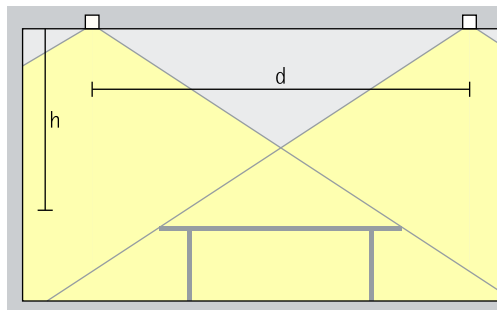

### General lighting


To achieve high uniformity and good facial recognition when illuminating office workplaces, the luminaire spacing of Jilly downlights with oval wide flood light distribution (d) can be up to 1.5 times the height (h) of the luminaire above the working plane.

Arrangement:  $d \leq 1.5 \times h$



Jilly square Recessed luminaires

Construction size









Size 5


LED module  
Maximum value  
at 4000K CRI 82

10W/1535lm
------------





Light colour

	2700K CRI 92		3500K CRI 92
	3000K CRI 82		4000K CRI 82
	3000K CRI 92		4000K CRI 92

Light  
distribution

Downlights		Downlights oval wide flood	
	Extra wide flood		Oval wide flood






Control

	Switchable		DALI
	Phase dimmable		Casambi Bluetooth

Colour (louvre)

	Silver
	Black

Accessories

	Concrete mounting enclosure		Mounting plate for panelled ceilings
	Spacer plate		Cover frame
	Mounting frame		



Article numbers and planning data:  
[www.erco.com/017875](http://www.erco.com/017875)

Design and application:  
[www.erco.com/jilly-square](http://www.erco.com/jilly-square)





